




art.nr. 301-018/MOD

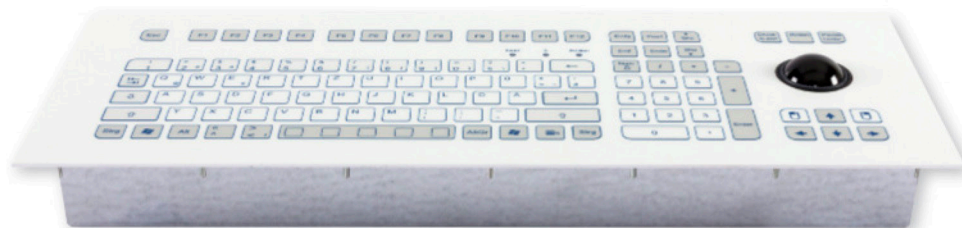

*EP-Version



FEATURES

- Panel mount version with reserve side threaded bolts
- Excellent tactile feedback
- Key relief printing
- Chemical, abrasion and scratch resistant frontsheet
- Resistant against dirt, dust and liquids (IP65)
- Frontplate alternatively with edge protection
- Integrated 38 mm trackball

TECHNICAL DATA

Number of keys:	105
Keyswitch technology:	short travel keys
Operating force:	2.6 N
Switch travel:	0.3 mm
Switching cycles:	approx. 3 mill. (per key)
Protection level (max):	IP65 static, IP54 dynamic
Mounting type:	front panel with threaded bolts
Front panel material:	aluminium
Interfaces:	USB
USB compatibility:	USB V1.1 compliance
Operating temperature:	0 °C to +70 °C
Storage temperature:	-25 °C to +80 °C


Dimensions:	482.6 x 177.8 x 61.6 mm
Dimensions (with EP):	482.6 x 177.8 x 62 mm
Compliance:	
-- Global:	REACH, RohS self-declaration
Weight:	1300 g

TECHNICAL DATA TRACKBALL

Ball diameter:	38 mm
Ball material:	phenolic resin
Operating principle:	mechanical

*As a special feature, the EP version offers a deep milled front panel with a peripheral edge for optimum protection of the foil edge.


TECHNICAL DRAWING (in mm)

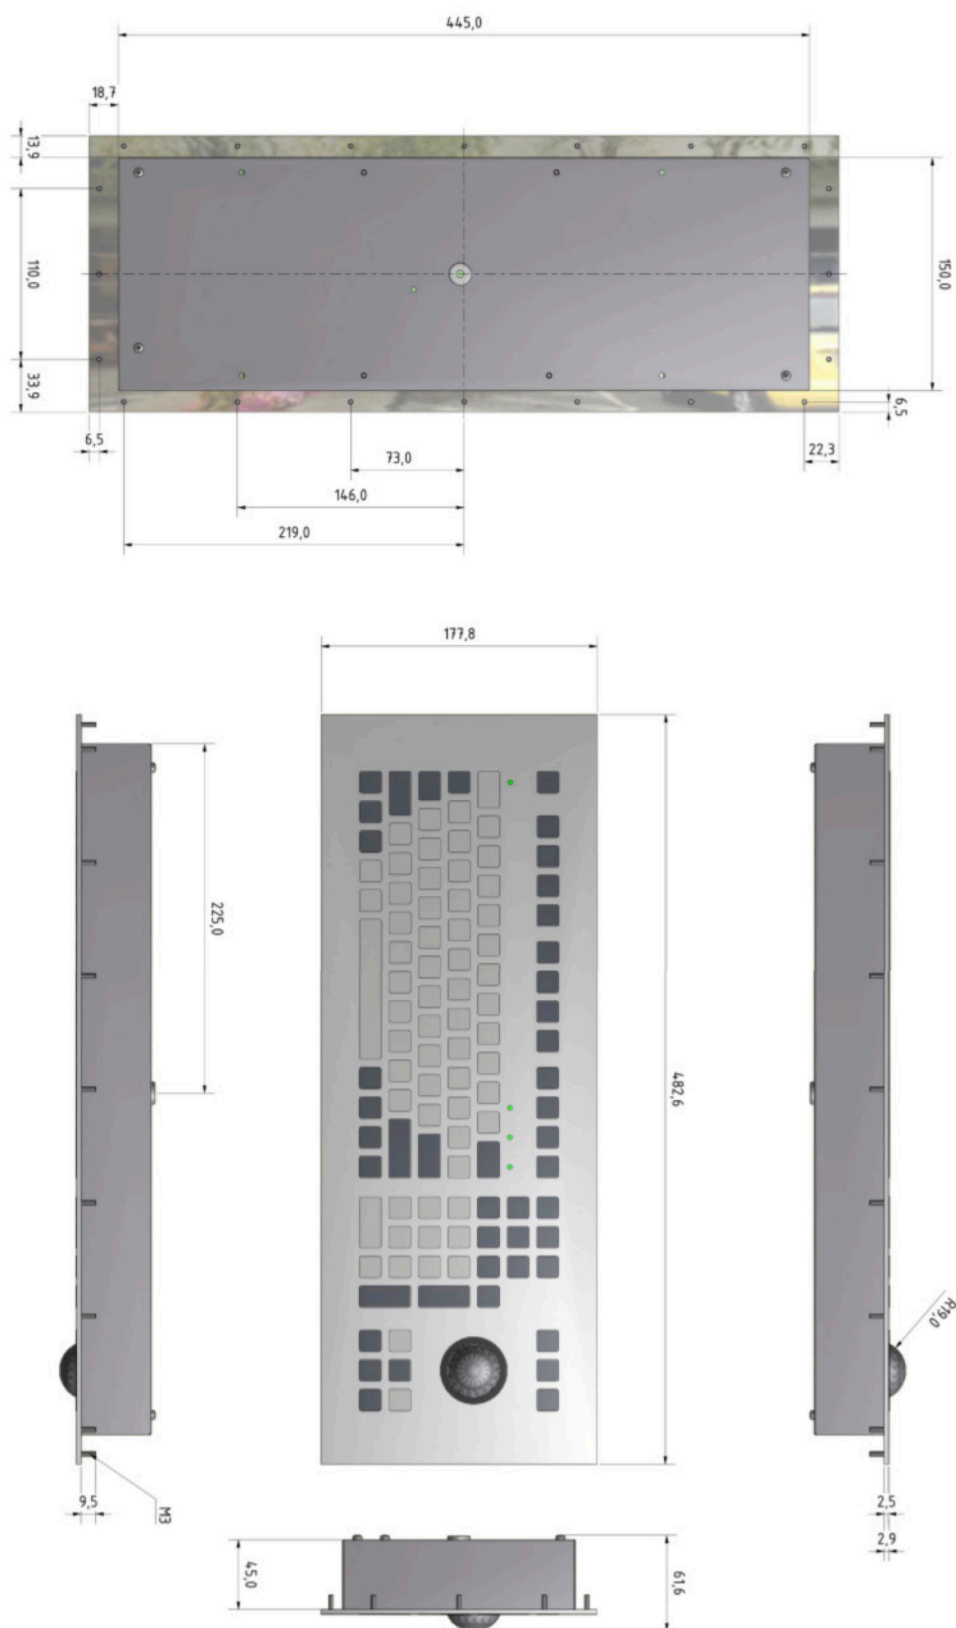

Subject to modifications and errors

Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: 445,0
- Overall height: 150,0
- Inner width: 292,0
- Inner height: 110,0
- Top edge offset: 19,9
- Right edge offset: 17,7
- Bottom edge offset: 22,3
- Left edge offset: 6,5
- Central hole diameter: 14,6,0
- Four corner holes (diameter 6,5) located at the corners of the inner rectangle.
- Four side holes (diameter 6,5) located on each of the four sides of the inner rectangle.
- Four corner holes (diameter 6,5) located at the corners of the outer rectangle.

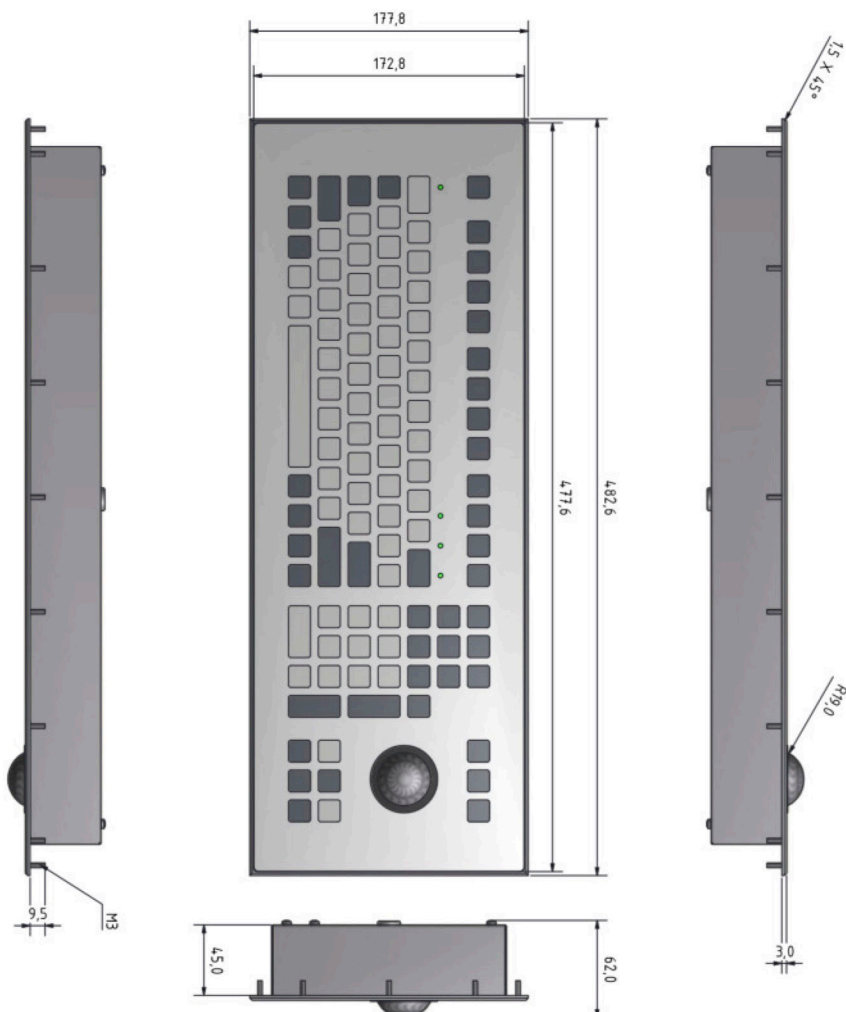

www.distus.nl