# Article #: 501-000/MOD/MT RVS keyboard module (front panel mounting), USB



## **Description**

A vandalism protected robust keyboard with 105 buttons (with function keys) and numpad. Explicitly for surroundings where there is danger by vandalism and/or much customer traffic and/or extreme weather conditions. Suitable for industrial, extreme (damp, splash water, dusty) surroundings.

### **Features and Benefits**


- Predestined for public surroundings (vandalism risk), industrial extreme surroundings.
- All electronic components and mechanical guides are protected against ingress of dust and water spray (IP65).
- 1,5- 2,5 mm medium travel distance keys with pleasant tactile feedback.
- Non-wearing laser lettering, non-removable, twist-proof key tops.

## **Specifications**


Specifications	
Protection Level	IP65 front
Power	Input +5V/DC, 50 mA
Key Layout	105 keys, US layout (other layout on request)
Key Switch Technology	Carbon contacts
Button Life	10 million ops.
Power/Interface	USB connector (+PS/2 available on request)
Key Force /Travel	0,9 N / 1,6 mm tactile feel
Dimensions	Approx. 449 x 145,4 x 21 mm
Weight	2.000 g
Material	Front: stainless steel construction (RVS)
Temperature range	Storage: -20°C to +70°C, Operation: -20°C to +70°C
Agency Approvals	CE, EMC, RoHS

### **Dimensions:**

#### Front site view

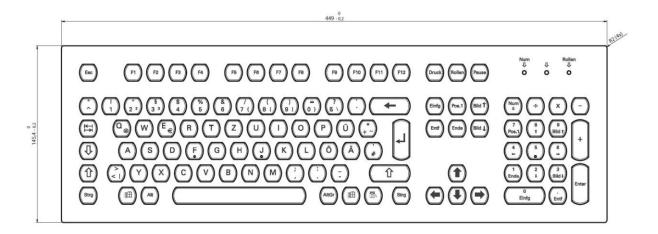

#### Side and Rear site view

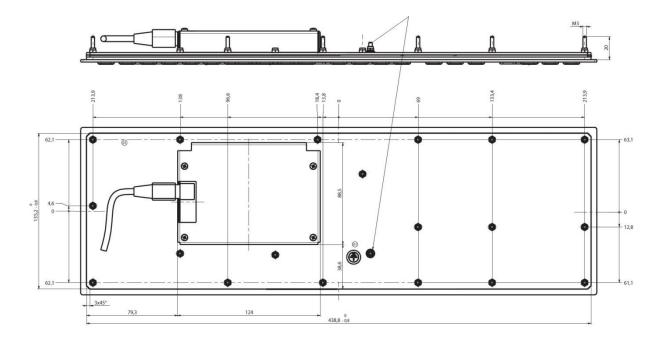

### **Cross section**

